drape











Distraction-blocking panels to enhance workers' focus






The slim profile panels are only 1 3/16" thick. The core of these panels have glass wool insulation for excellent sound absorption. The clean and straightforward design creates mini-environments for focus throughout the office while also adding aesthetic interest points and color to the workplace.

NRC Value - 0.70 'Noise Reduction Coefficient SAA Value - 0.68 'Sound Absorption Average Note: Results are of the Felt applied panel. Value varies according to cover fabric.


The measurement results comprise materials evaluations for panel units, and do not guarantee actual sound absorption effects.

ASTM E84 - Class A


Note: Results are of the Felt applied panel and Interlock applied panel.

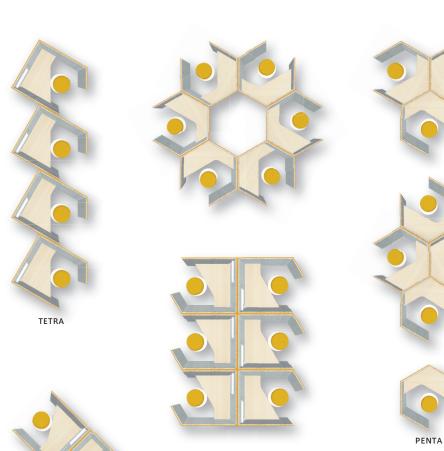













Function





need to concentrate and focus.





The Tri requires less than 40"×40" of floor space, a footprint similar to four carpet tiles.

- 1 When inside the booth, the user sits facing the inside corner, cutting visual interference from outside. The diagonally cut tabletop also secures ample workspace and legroom.
- 2 Tetra's small panel behind the user prevents others from looking inside, giving the user a feeling of security.



3 The slim profile panels are only 13/16" thick and features an edge profile cut at a 60 degree angle. The twotoned panels create sharp

Line Up




The code for the left type and right type of Tri and Penta is the same. Variation with 75 9/16° high panels would need lighting on the desk or from the ceiling. We recommend using a non-swivel chair for Tetra and Penta.

< Common specifications > Panel : Sheet metal with levelers, Surface : Fabric or Felt, Sound absorbent material : Glass-wool, Tabletop : Laminated work surface, Wire management tray: Powder coated steel

Colors

■ Panel (Combination)

Felt (Two-tone)



■ Tabletop (Combination)

Tabletop	MG99	MX61*	MX62*	MX63*	
Edge					l
Bracket/Foot	Tabletop : MG07 (White) Edge : G939 (White)	Tabletop: MX51(Prize Wood Light) Edge: GE21 (Prize Wood Light)	Tabletop: MX52(Prize Wood Medium) Edge: GE22(Prize Wood Medium)		
ZK25 (Black)	MHE6	MHV3	MHV4	MHV5	

*Anti - fingerprint laminate surface provides resistance to fingerprints and easily wipes clean

Options

■ Power Accessory



A power unit can be attached underneath the tabletop at your preferred

С	Configuration		Code
B V 3	2 Power 1 Dual USB charger w/72" 90 degree plug cord	Black	MMD3BA-Y708
		White	MMD3BA -Y707
0.0.5	3 Power	Black	MMD3BB-Y708
V V	w/72" 90 degree plug cord	White	MMD3BB -Y707

C	Configuration		Code
	2 10W USB A Ports w/72" power supply cord with a barrel connector	Black	MMD2CA -Y708
		White	MMD2CA -Y707
• • • •	10W USB A Port 15W USB C Port w/72" power supply cord with a barrel connector	Black	MMD2CB -Y708
		White	MMD2CB -Y707

There is a 1/2" gap between the bottom of the panel and the floor allowing enough room for a cable to pass through.

■Wall Light





2 19/32 usable

The optional lighting is soft on the eyes yet strong enough to aid your work. The wall light is available with downlight only or with both uplight and downlight.

ZA75 (Neo White), ZK25 (Black)

Lighting	Uplight & Downlight kit (Daisy-chained)	4WAZYYN -Y647	*Please prepare a power outlet be- low the tabletop.	
Fixture	Downlight kit (Stand-alone)	4WAZZYN -Y647		
Bracket	For Tri/Tetra	4WA91AN-ZA75, ZK25	*For North Amer-	
DIACKEL	For Penta	4WA91CN-ZA75、ZK25	ican Market Only	

< Common specifications > Bracket: Powder coated steel, Vertical wiring duct: Powder coated steel

<Light specifications>Power consumption : 5.0W(Stand-alone)9.4W(Daisy-chained) Color temperature: 3500K Color rendering index: 85 Switch: Capactive touch sensor (Master control for Daisy-chained kit)Brightness adjustability: 100% - 15% continous; w/last state memory (when powered) Automatic turn of r- after 12hours(-15 fromiss). Certifications: ETL listed (UL153 & CSA C222 No.250.4, FCC Part 15 Class B, CECT title 20)


■ Vertical Wiring Duct





		Zouo (skip Gray)
For Tril (Total	28 3/8" H	4WAY1YN -Z606
For Tri/Tetra	39 3/8" H	4WAY2YN-Z606
For Penta	39 3/8" H	4WAY3YN-Z606


<Common specifications > Vertical wiring duct : Powder coated steel

Measurements









^{*}For North American Market Only



okamura

Australia Wide | 1300 824 824 | uci.com.au